



## **gM1L-900**

### **1x1 IEEE 802.11 b/g High Power Mini PCI Radio Module**

**gM1L-900** is an IEEE 802.11b/g 900 MHz to 1000 MHz Radio Module built over Vizmonet's innovative Built-to-Customize™ platform engineered for carrier class long range high data capacity applications.

With superior TX power efficient RF design, the product supports high TX Power offering best-in class EVM performance at higher modulation schemes. This facilitates to achieve long range without compromising data throughput.

With well-engineered RX Design, gM1L-900 offers ultra-low receive sensitivity to achieve long range.

Backed by military grade technology, the product is ideal for deployment in harsh outdoor environment and available with plenty of options for customization to enable easy integration into OEM systems.



#### **FEATURES**

- IEEE 802.11b/g standards compliant operating in the frequency range 900 MHz to 1000 MHz
- High TX Power of up to +27 dBm for lower data rates
- Atheros AR5414A-001 Chipset
- Mini PCI Type IIIA form factor 59.6 mm (L) x 65 mm (W)
- Support for Customization for OEM integration
- Operating Temperature range (-20 deg C to +70 deg C)

**TECHNICAL SPECIFICATION****RADIO MODULE – GENERAL INFO**

Chipset Info	Atheros AR5414A-001
Operating Frequency	900 MHz to 1000 MHz
Security	WPA,WPA2, 802.11i with AES-CCM & TKIP Encryption, 802.1x, 64/128/152bit WEP
Data Rates	6Mbps, 9Mbps, 12Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps
Channel Bandwidth	5 MHz/10 MHz/20 MHz/40 MHz
RoHS Compliance	Compliant
Operating System Support	Linux Open WRT and Ath5K driver

**INTERFACE SPECIFICATIONS**

Interface	PCI 32 bit,33 MHz, mini PCI Form Factor
Operating Voltage	3.3V
RF Antenna connector	Single MMCX, Vertical

**PHYSICAL SPECIFICATIONS**

Mechanical Dimension (Assembled condition)	59.6 mm (L) x 65 mm (W) x 5.1 mm (H)
Weight of the module without ESD Bag	22 g
Weight of the Module with ESD Bag	24 g

**CUSTOM FEATURES**

MAC ID	74-E2-77-00 series
PCI Sub Vendor ID	168C
PCI Sub Device ID	121B
TX Power offset	10 dB
Frequency offset	TBD
LABELS	MAC Label x1 pc on the Radio Module Model Label x pc with dual barcode on the ESD bag

**REGULATORY INFORMATION**

Regulatory Approvals	TBD
----------------------	-----

**PACKAGING INFORMATION**

100 Units per Carton Box	520 mm (L) x 240 mm (W) x 133 mm (H)
--------------------------	--------------------------------------

**ORDERING INFORMATION**

gM1L-900	Mini PCI Radio Module, 1x1 IEEE 802.11 b/g, 900 MHz, 27 dBm
----------	---

**RADIO SPECIFICATION - RX**

Receiver Maximum input level (10% PER)	> -10 dBm
Receive Chain Noise Figure	5.5 dB
Frequency Accuracy	Within $\pm$ 15 PPM
Receiver Adjacent Channel Rejection (ACR)	
10 to 20 MHz, 10% PER	1 Mbps > 35 dB
	6 Mbps > 20 dB
Receiver Alternate Channel Rejection (ALCR)	
20 to 30 MHz, 10% PER	1 Mbps > 45 dB
	6 Mbps > 30 dB

**RADIO SPECIFICATION - TX**

Transmit Spectral mask	
11 MHz/20 MHz/30MHz Offset	> -20 dB/> -28 dB/> -40 dB
RF Power control Step	0.5 dBm
Second Harmonic Spurious Emission	-30 dB
Third Harmonic Spurious Emission	-40 dB
Transmitter Spurious Emission	TBD

**RADIO SPECIFICATION – TX/RX**

RADIO TX/RX PERFORMANCE, 20 MHz BW						
	DATA RATE	MODULATION	TX POWER $\pm$ 1 dBm	TX CURRENT (A) AT 3.3V $\pm$ 0.1A	RX SENSITIVITY $\pm$ 2 dBm	RX CURRENT(A) AT 3.3V $\pm$ 0.1A
<b>11 g</b>	6 Mbps	BPSK	27	1.2	-92	0.38
	9 Mbps	BPSK	27	1.2	-91	0.38
	12 Mbps	QPSK	27	1.2	-91	0.38
	18 Mbps	QPSK	27	1.2	-88	0.38
	24 Mbps	16QAM	27	1.2	-84	0.38
	36 Mbps	16QAM	24	1.1	-81	0.38
	48 Mbps	64QAM	23	1.0	-75	0.38
	54 Mbps	64QAM	22	0.9	-72	0.38
<b>11 b</b>	1 Mbps	BPSK	27	1.2	-95	0.38
	2 Mbps	QPSK	27	1.2	-93	0.38
	5.5 Mbps	CCK	27	1.2	-91	0.38
	11 Mbps	CCK	27	1.2	-90	0.38

For RX Sensitivity for 40 MHz Channel BW, Add +3 dB to 20 MHz BW


For RX Sensitivity for 10 MHz Channel BW, Add -3 dB to 20 MHz BW

For RX Sensitivity for 5 MHz Channel BW, Add -6 dB to 20 MHz BW

**MECHANICAL DIMENSIONS**

Note:

Standard version is supplied without heatsink. However the below picture is shown as a reference with optional Heat sink

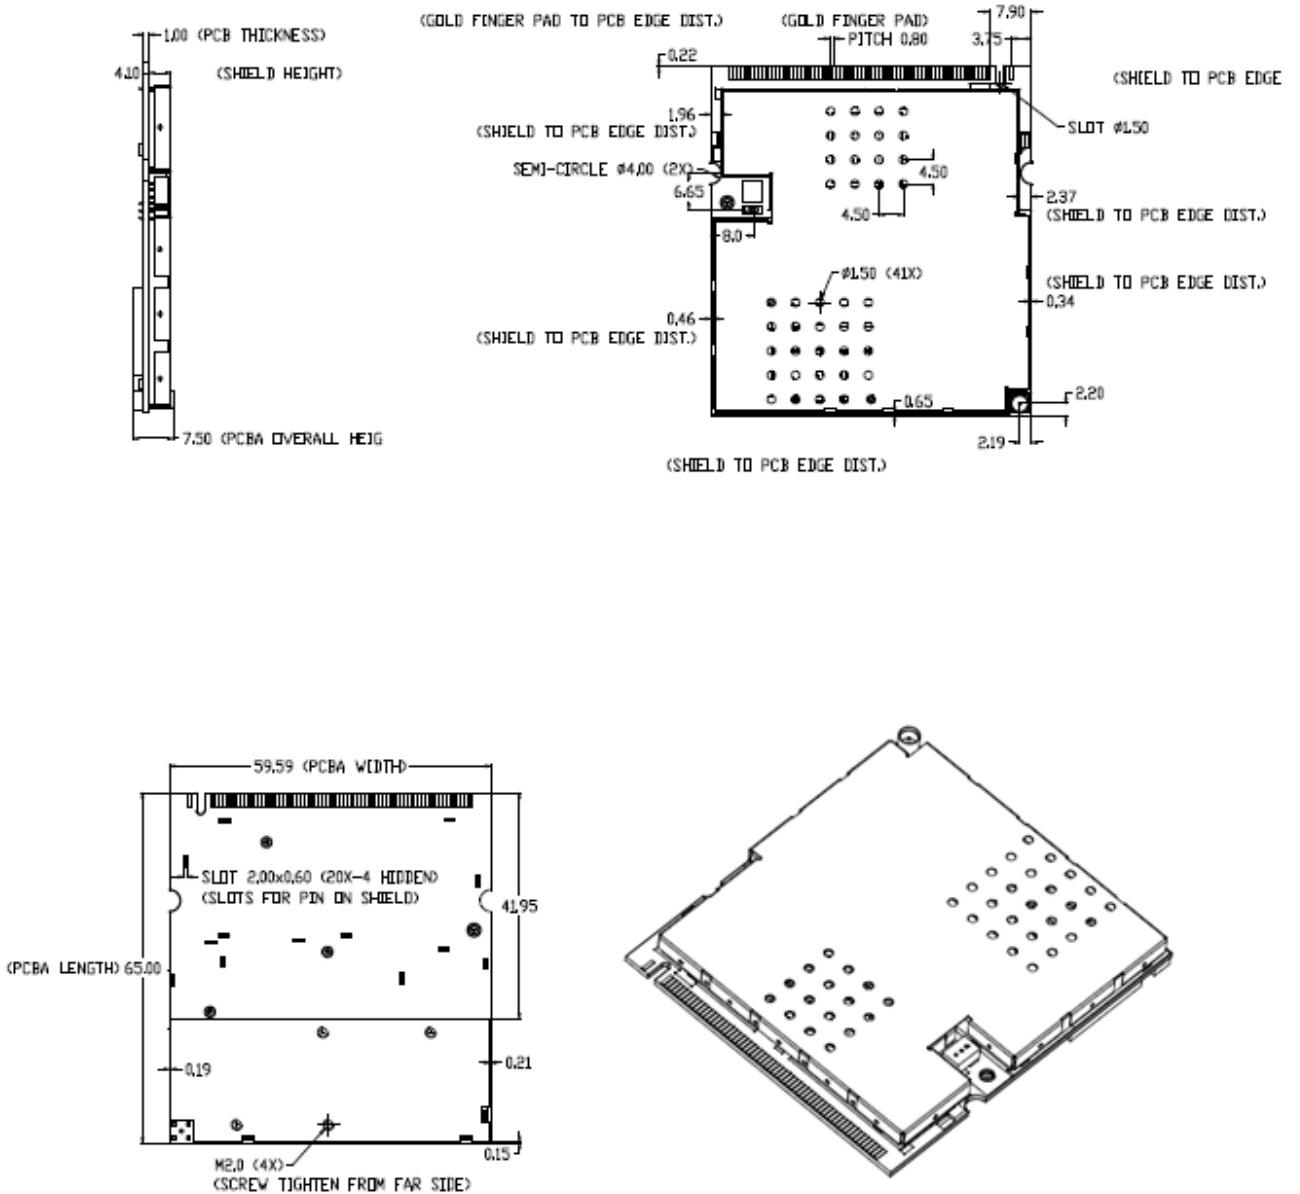

## **Disclaimer**

The information in this document is being provided in connection with Vizmonet products, which are subject to continuous developments and improvements. While every effort is made to ensure that the information contained in this document is correct and accurate at the time of this printing, Vizmonet makes no representations or warranties with respect to the accuracy of the information and is not liable for errors or mistakes that may arise. However, Vizmonet reserves the right to make changes to specifications and product descriptions at any time without notice. Vizmonet does not assume any responsibility for the use of the described product; neither does it convey any license under its patent rights, or the rights of others. Vizmonet products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

## **Trademarks**

Built-to-Customize™ is a trademark of Vizmonet. It represents the wide range of high Performance radio modules that are tailored made to meet OEM Customer's requirements. All other trademarks, registered trademarks and product names are the sole property of their respective owners.

© 2016, Vizmonet. All rights reserved.

## **Contact Information**

Web site: [www.vizmonet.com](http://www.vizmonet.com)

Email: [enquiry@vizmonet.com](mailto:enquiry@vizmonet.com)

## **Address:**

Vizmonet Pte Ltd

21, Woodlands Close

#08-37, Primz Biz Hub

Singapore 737 854