




nM2-5150

2x2 IEEE 802.11 a/n High Power Mini PCI Radio Module

nM2-5150 is an IEEE 802.11 a/n 5150 MHz to 5850 MHz Radio Module built over Vizmonet's innovative Built-to-Customize™ platform engineered for carrier class long range high data capacity applications.

With superior TX power efficient RF design, the product supports high TX Power offering best-in class EVM performance at higher modulation schemes. This facilitates to achieve long range without compromising data throughput.

With well-engineered RX Design, nM2-5150 offers ultra-low receive sensitivity to achieve long range.

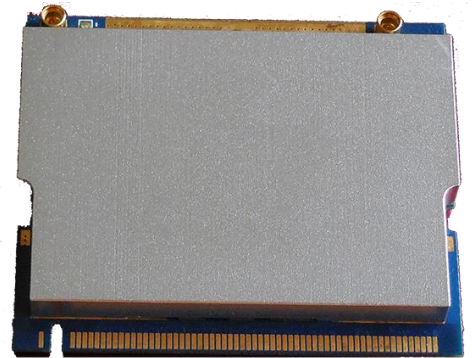

FEATURES

- IEEE 802.11n standards compliant operating in the Public Safety Band 5150 MHz to 5850 MHz
- Backward compatible with legacy IEEE 802.11a systems
- 2x2 MIMO with 2xMMCX Antenna connector supports spatial multiplexing
- High TX Power of up to +29 dBm for lower data rates
- Atheros AR9220 Chipset
- Mini PCI Type IIIA form factor – 59.6mm(W)x51mm(L)
- Military grade Shield Cover with option for integrated bracket to secure the Radio Module to OEM system
- Support for Customization for OEM integration
- Operating Temperature range (-20 deg C to +70 deg C)

TECHNICAL SPECIFICATION**RADIO MODULE – GENERAL INFO**

Chipset Info	Atheros AR9220-AC1A
Operating Frequency Channels (5150 MHz ~ 5850 MHz)	5.150 ~ 5.350 GHz, 5.470 ~ 5.725GHz, 5.725 ~ 5.850 GHz (US & Canada) 5.150 ~ 5.350 GHz, 5.470 ~ 5.725GHz, 5.725 ~ 5.875 GHz (Europe) 5.150 ~ 5.250 GHz, 5.250 ~ 5.350GHz, 5.470 ~ 5.725GHz(Japan)
Security	WPA,WPA2, 802.11i with AES-CCM & TKIP Encryption, 802.1x, 64/128/152bit WEP
Data Rates Legacy 11a up to 54 Mbps	6Mbps, 9Mbps, 12Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
11n HT20-1S up to 65Mbps @ 800GI, 72.2Mbps @ 400GI /11n HT40-1S up to 135Mbps @ 800GI, 150Mbps @ 400GI	MCS0,MCS1,MCS2,MCS3,MCS4,MCS5,MCS6,MCS7 IEEE 802.11n HT20/HT40 Single Stream
11n HT20-2S up to 130Mbps @ 800GI, 144.4Mbps @ 400GI/11nHT40-2S up to 270Mbps @ 800GI, 300Mbps @ 400GI	MCS8,MCS9,MCS10,MCS11,MCS12,MCS13,MCS14,MCS15 IEEE 802.11n HT20/HT40 Dual Stream
Channel Bandwidth	5 MHz/10 MHz/20 MHz/40 MHz
RoHS Compliance	Compliant
Operating System Support	Linux Open WRT and Ath9K driver

INTERFACE SPECIFICATIONS

Interface	PCI 32 bit, 33 MHz, mini PCI Form Factor
Operating Voltage	3.3V
RF Antenna connector	Dual MMCX, VERTICAL

PHYSICAL SPECIFICATIONS

Mechanical Dimension (Assembled condition)	(L) 59.6 mm x (W) 51 mm x (H) 8.5 mm
Weight of the Module without ESD Bag	31 g
Weight of the module with ESD Bag	33 g

CUSTOM FEATURES

MAC ID	74-E2-77- 00 series
PCI Sub Vendor ID	168C
PCI Sub Device ID	1502
TX Power offset	6 dB
Labels	MAC Label x1 pc on the Radio Module Model Label x pc with dual barcode on the ESD bag

REGULATORY INFORMATION

FCC	TBD
IC,ce	TBD

PACKAGING INFORMATION

100 UNITS PER CARTON	520 mm (L) x 240 mm (W) x 133 mm (H)
----------------------	--------------------------------------

ORDERING INFORMATION

nM2-5150	Mini PCI Radio Module, 2x2 IEEE 802.11 a/n , 5.15 GHz, 29 dBm
----------	---

RADIO SPECIFICATION - RX

Receiver Maximum input level (10% PER)	> -10 dBm
Receive Chain Noise Figure	5.5 dB
Frequency Accuracy	Within \pm 15 PPM
Receiver Adjacent Channel Rejection (ACR) 10 to 20 MHz, 10% PER	6 Mbps > 30 dB HT20 MCS0,MCS8 > 30 dB HT40 MCS0,MCS8 > 20 dB
Receiver Alternate Channel Rejection (ALCR) 20 to 30 MHz, 10% PER	6 Mbps > 40 dB HT20 MCS0,MCS8 > 40 dB HT40 MCS0,MCS8 > 35 dB
Receiver Blocking	TBD


RADIO SPECIFICATION - TX

Transmit Spectral mask	At 11 MHz Offset > -20 dBr At 20 MHz Offset > -28 dBr At 30 MHz Offset > -40 dBr
RF Power control Step	0.5 dBm
Second Harmonic Spurious Emission	-45 dB
Third Harmonic Spurious Emission	-45 dB
Transmitter Spurious Emission	Complying FCC 47 CFR Part 15.247 Sub Part C Requirements

RADIO SPECIFICATION - TX/RX

RADIO TX/RX PERFORMANCE, FOR 2 CHAINS, 20 MHz CH BW						
	DATA RATE	MODULATION	TX POWER \pm 1 dBm	TX CURRENT (A) AT 3.3V \pm 0.1A	RX SENSITIVITY \pm 2 dBm	RX CURRENT(A) AT 3.3V \pm 0.1A
11 a	6 Mbps	BPSK	29	1.2	-95	0.15
	9 Mbps	BPSK	29	1.2	-95	0.15
	12 Mbps	QPSK	29	1.2	-94	0.15
	18 Mbps	QPSK	29	1.2	-93	0.15
	24 Mbps	16QAM	29	1.2	-89	0.15
	36 Mbps	16QAM	26	1.0	-86	0.15
	48 Mbps	64QAM	24	0.8	-82	0.15
	54 Mbps	64QAM	23	0.7	-80	0.15
11 n HT 20	MCS0/8	BPSK	28	1.1	-94	0.15
	MCS1/9	QPSK	28	1.1	-93	0.15
	MCS2/10	QPSK	28	1.1	-91	0.15
	MCS3/11	16QAM	28	1.1	-88	0.15
	MCS4/12	16QAM	27	1.0	-85	0.15
	MCS5/13	64QAM	25	0.8	-81	0.15
	MCS6/14	64QAM	23	0.7	-79	0.15
	MCS7/15	64QAM	22	0.6	-77	0.15
11 n HT40	MCS0/8	BPSK	27	1.0	-91	0.15
	MCS1/9	QPSK	27	1.0	-90	0.15
	MCS2/10	QPSK	27	1.0	-88	0.15
	MCS3/11	16QAM	27	1.0	-85	0.15
	MCS4/12	16QAM	26	0.9	-82	0.15
	MCS5/13	64QAM	25	0.8	-78	0.15
	MCS6/14	64QAM	23	0.7	-77	0.15
	MCS7/15	64QAM	22	0.6	-74	0.15

MECHANICAL DIMENSIONS

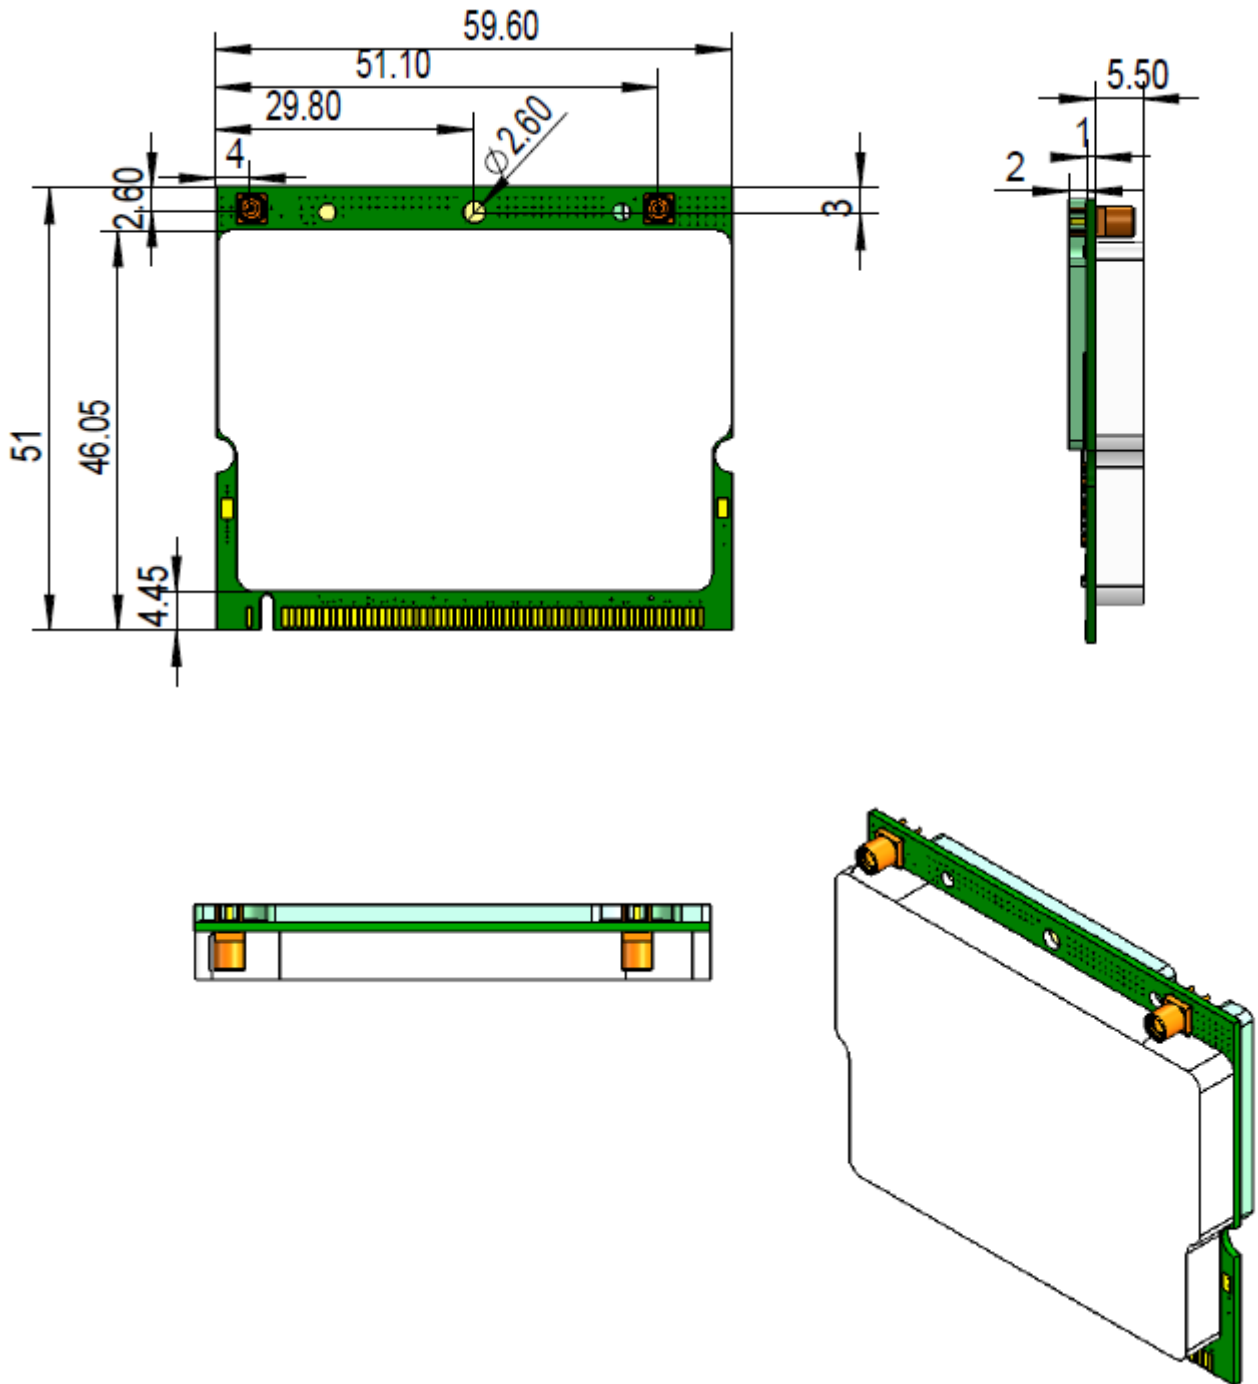

Disclaimer

The information in this document is being provided in connection with Vizmonet products, which are subject to continuous developments and improvements. While every effort is made to ensure that the information contained in this document is correct and accurate at the time of this printing, Vizmonet makes no representations or warranties with respect to the accuracy of the information and is not liable for errors or mistakes that may arise. However, Vizmonet reserves the right to make changes to specifications and product descriptions at any time without notice. Vizmonet does not assume any responsibility for the use of the described product; neither does it convey any license under its patent rights, or the rights of others. Vizmonet products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

Trademarks

Built-to-Customize™ is a trademark of Vizmonet. It represents the wide range of high Performance radio modules that are tailored made to meet OEM Customer's requirements. All other trademarks, registered trademarks and product names are the sole property of their respective owners.

© 2016, Vizmonet. All rights reserved.

Contact Information

Web site: <https://vizmonet.com>

Email: enquiry@vizmonet.com

Address:

Vizmonet Pte Ltd
21, Woodlands Close
#03-01, Primz Biz
Singapore 737 854